

八王子市道路占用工事取扱基準 別添 標準断面図

この図によらない場合、復旧構造は道路管理者の指示によるものとする。

舗装復旧構造

【車道】

種別	密粒	粗粒	アス処理	M40	C40
60型	5	5	10	20	20
中級 I	5	5	10	15	20
50型	5	5	10	15	15
中級 II	5	10	—	15	15
40型 A	5	5	—	15	15
40型 B	5	—	—	15	20
35型	5	5	—	10	15
中級 III	5	—	—	15	15
簡易 A	5	—	—	10	15
簡易 B	5	—	—	15	—
25型	開粒 II 号-5		—	—	20
砂利	—	—	—	—	15

【歩道】

歩 B	細粒-4, M30-10
透水性24	開粒 II 号-4, C30-15, しゃ砂-5
透水性19	開粒 II 号-4, C20-10, しゃ砂-5
ILB透水性	ILB-8, 砂-2, C30-15, しゃ砂-5
ILB非透水	ILB-8, 砂-2, M30-10


【歩道切下げ】

C o	コンクリート-15, M40-15
Co大型	コンクリート-20, M40-20
A s	細粒-5, M40-30
As大型	細粒-5, 粗粒-10, M40-35
ILB	ILB-8, 砂-2, M40-10, C30-15


(単位 cm)

※ 再生材使用可能


舗装断面図

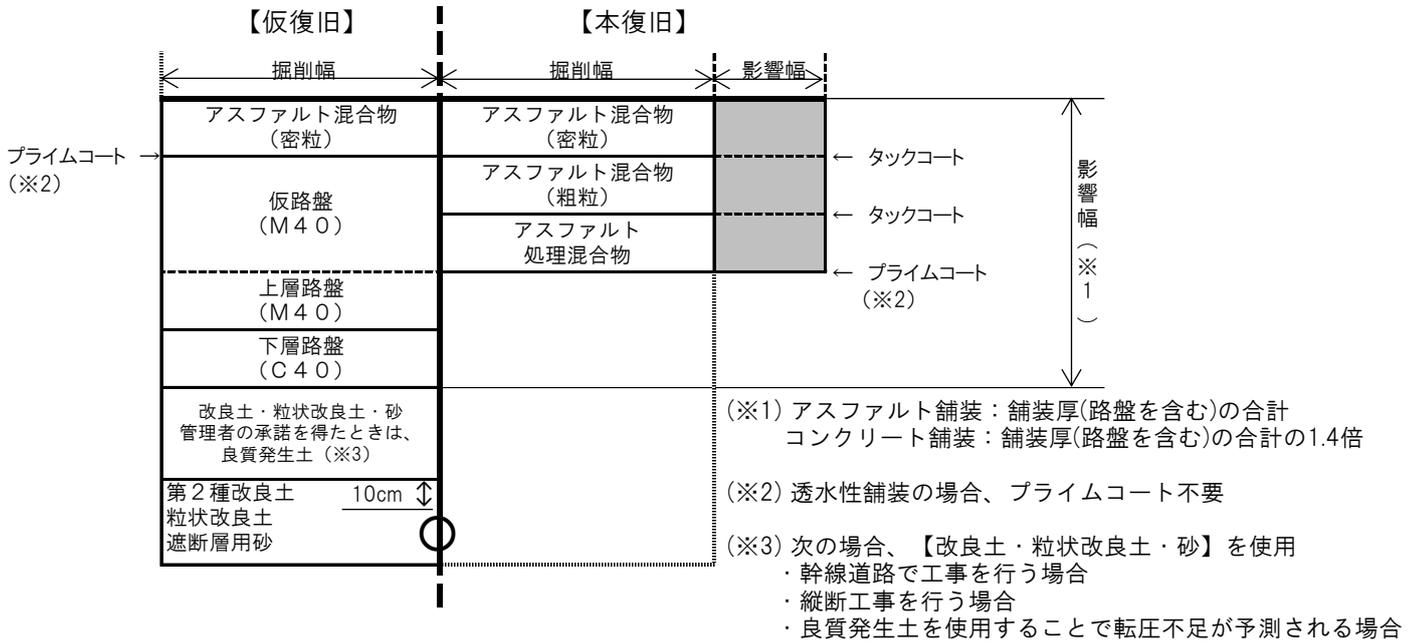


60型

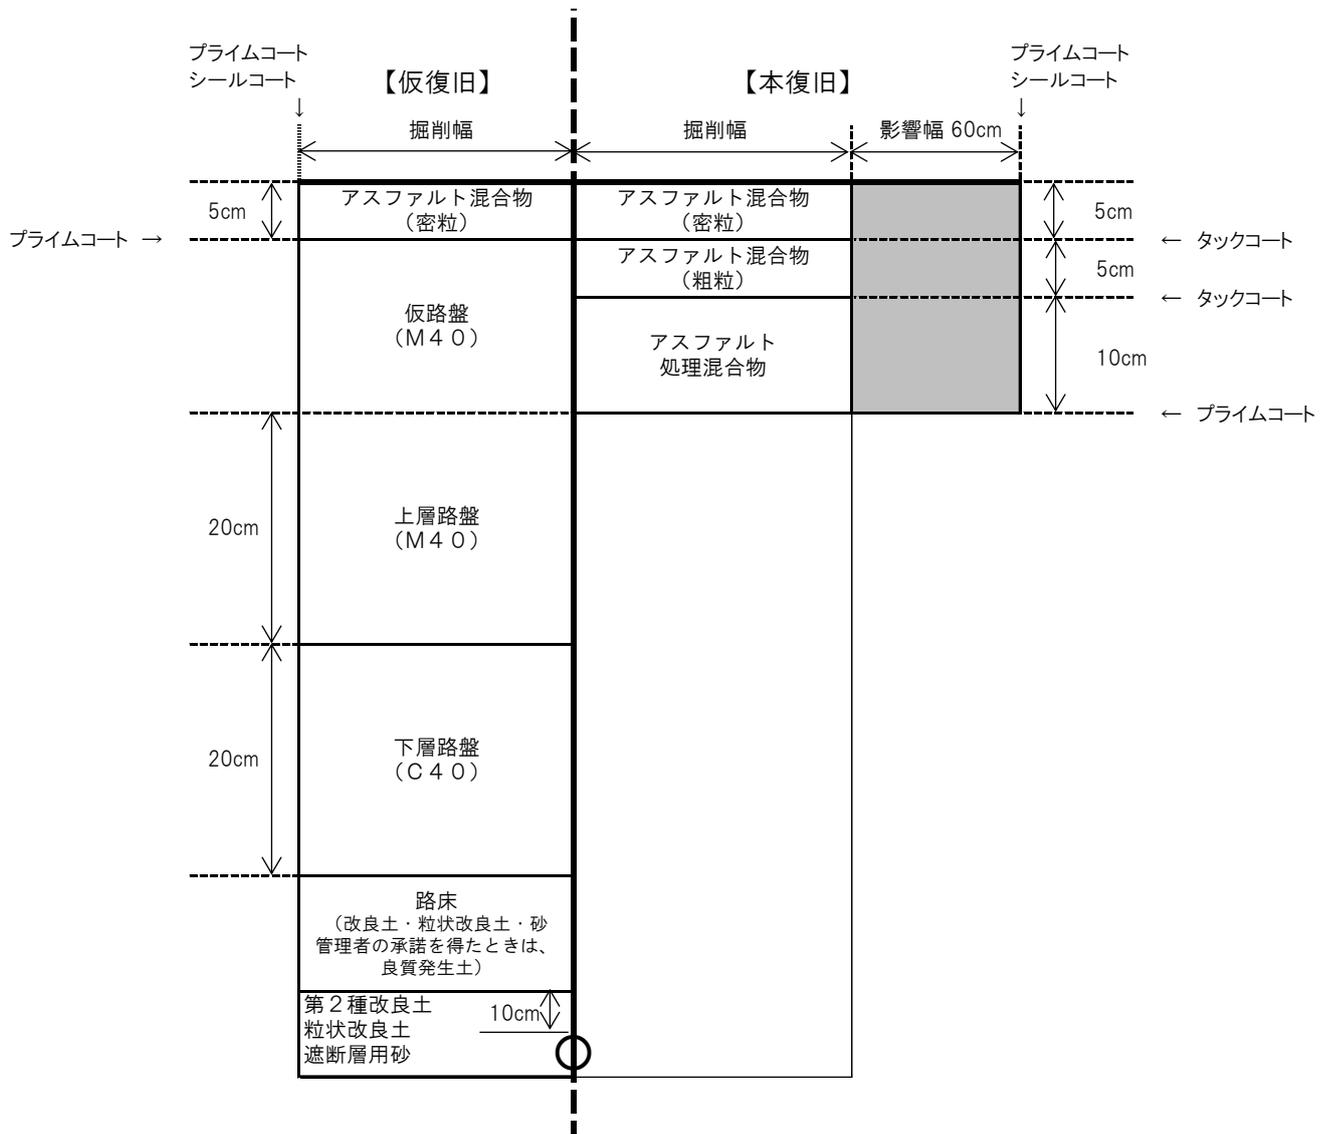


中級 I

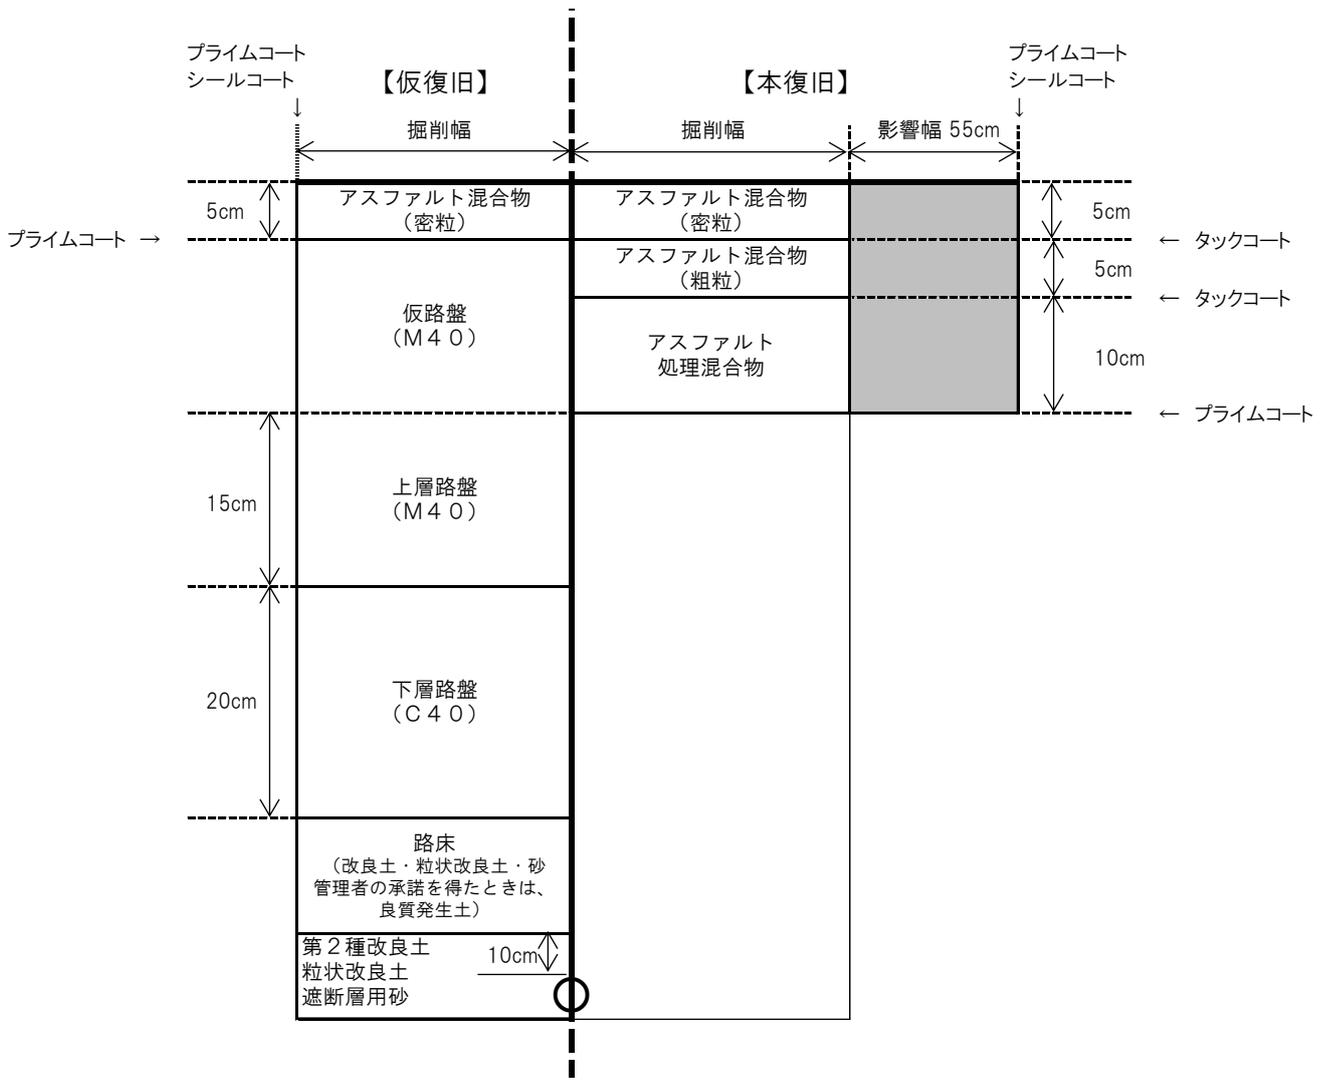


50型

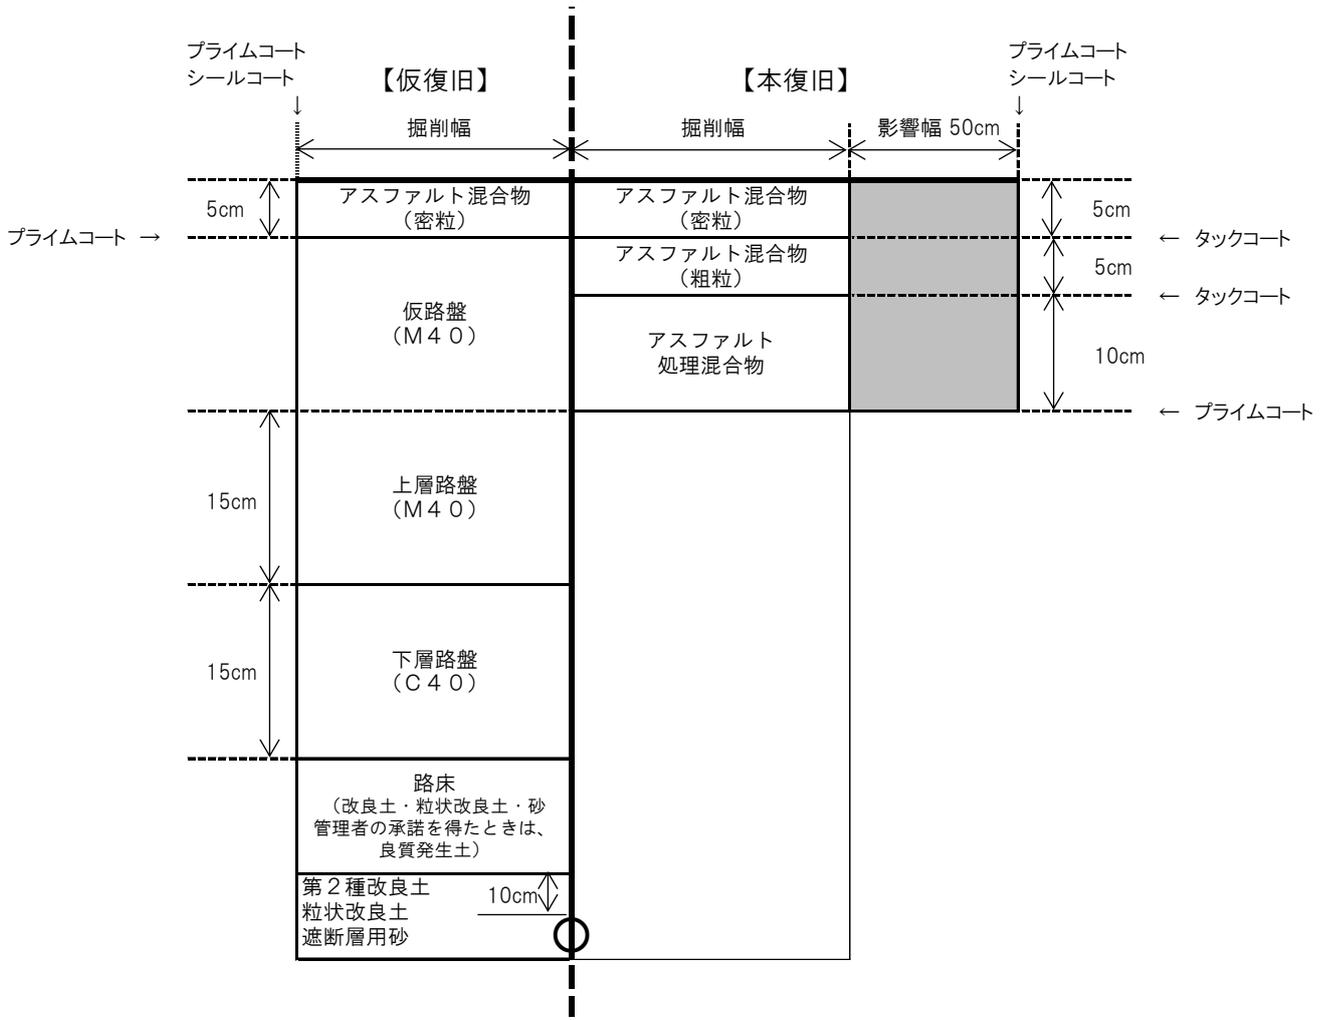


中級Ⅱ

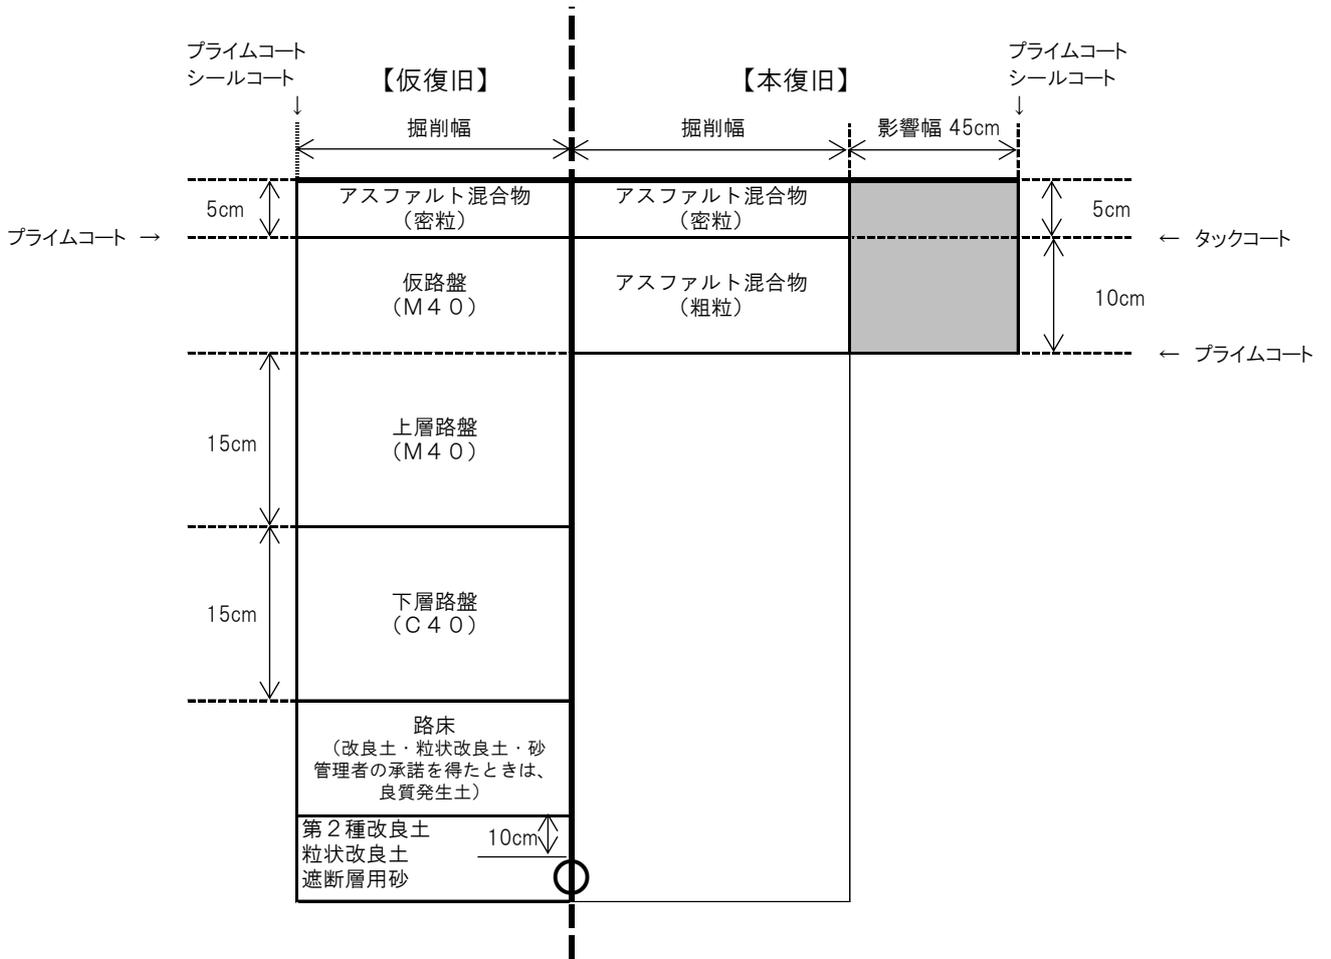


40型A

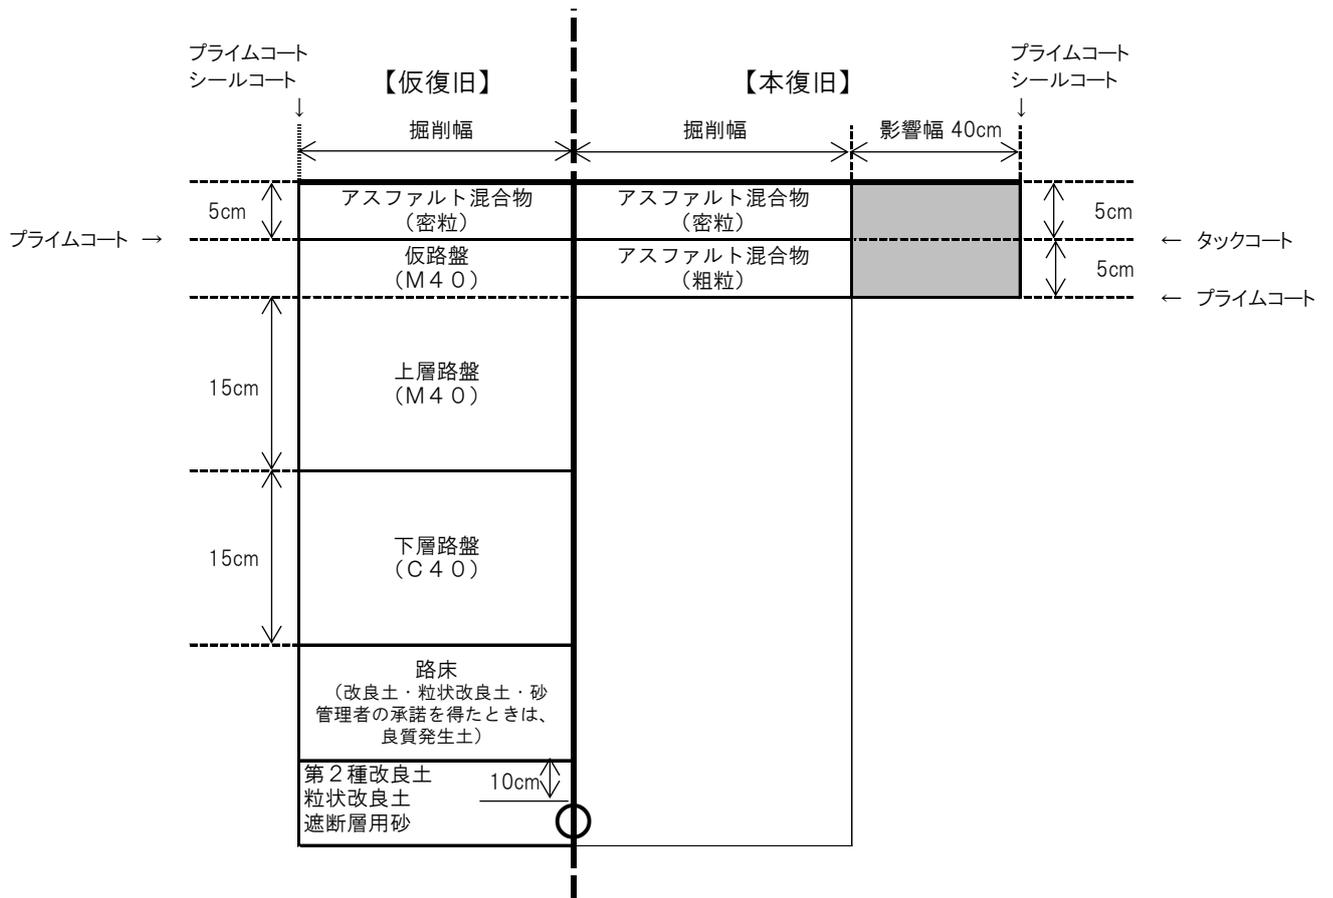


40型B

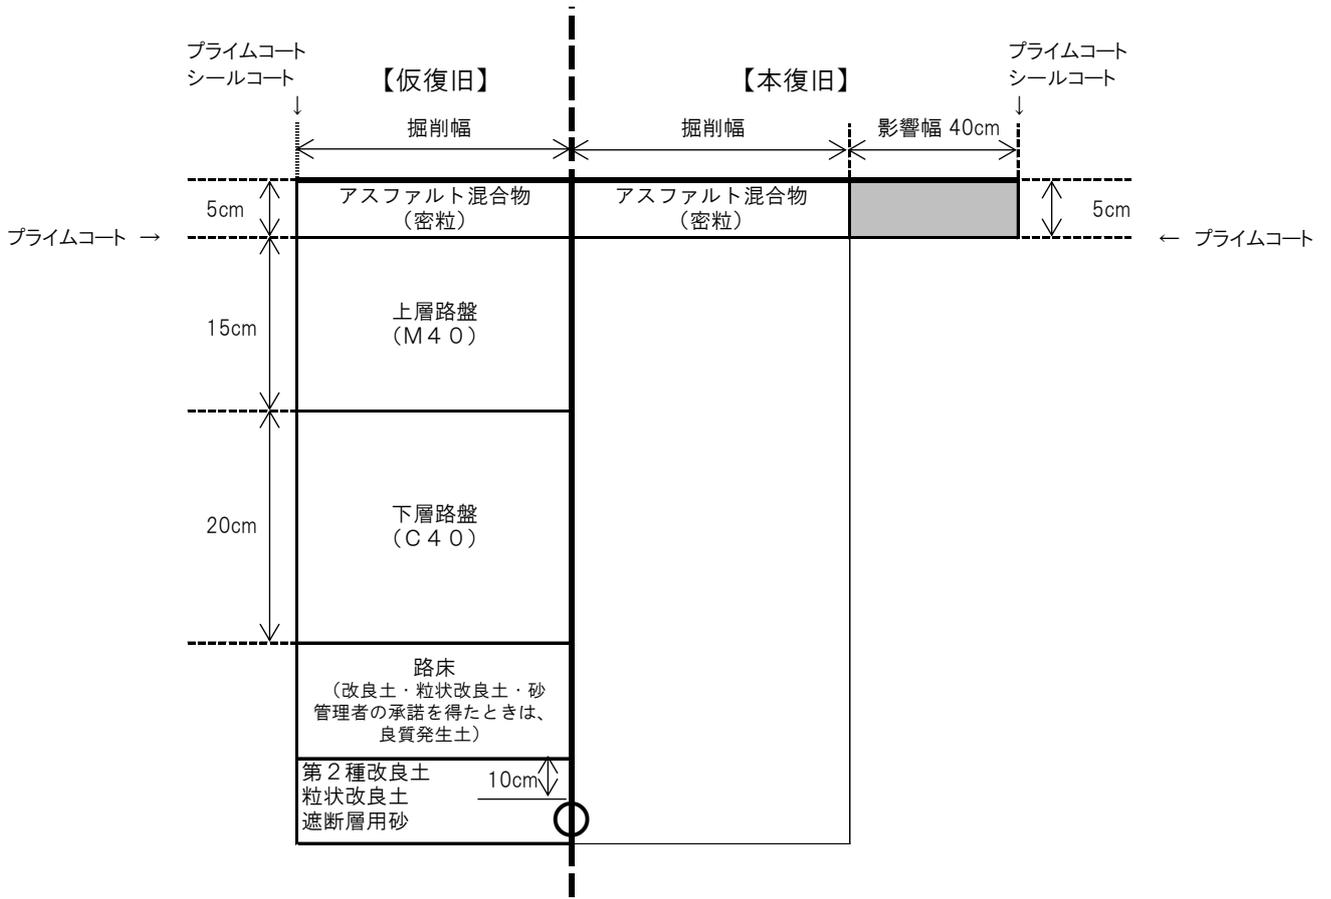


35型

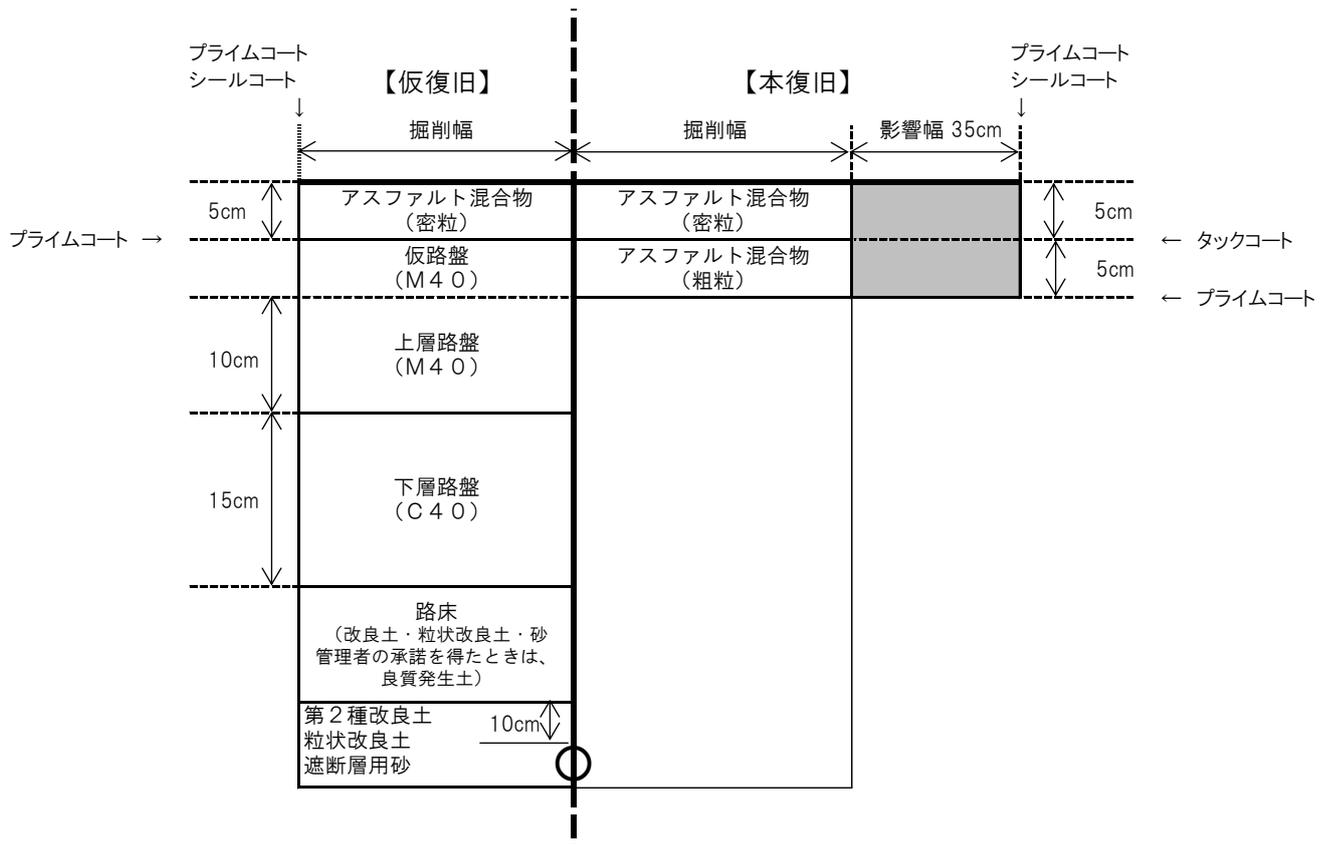


中級Ⅲ

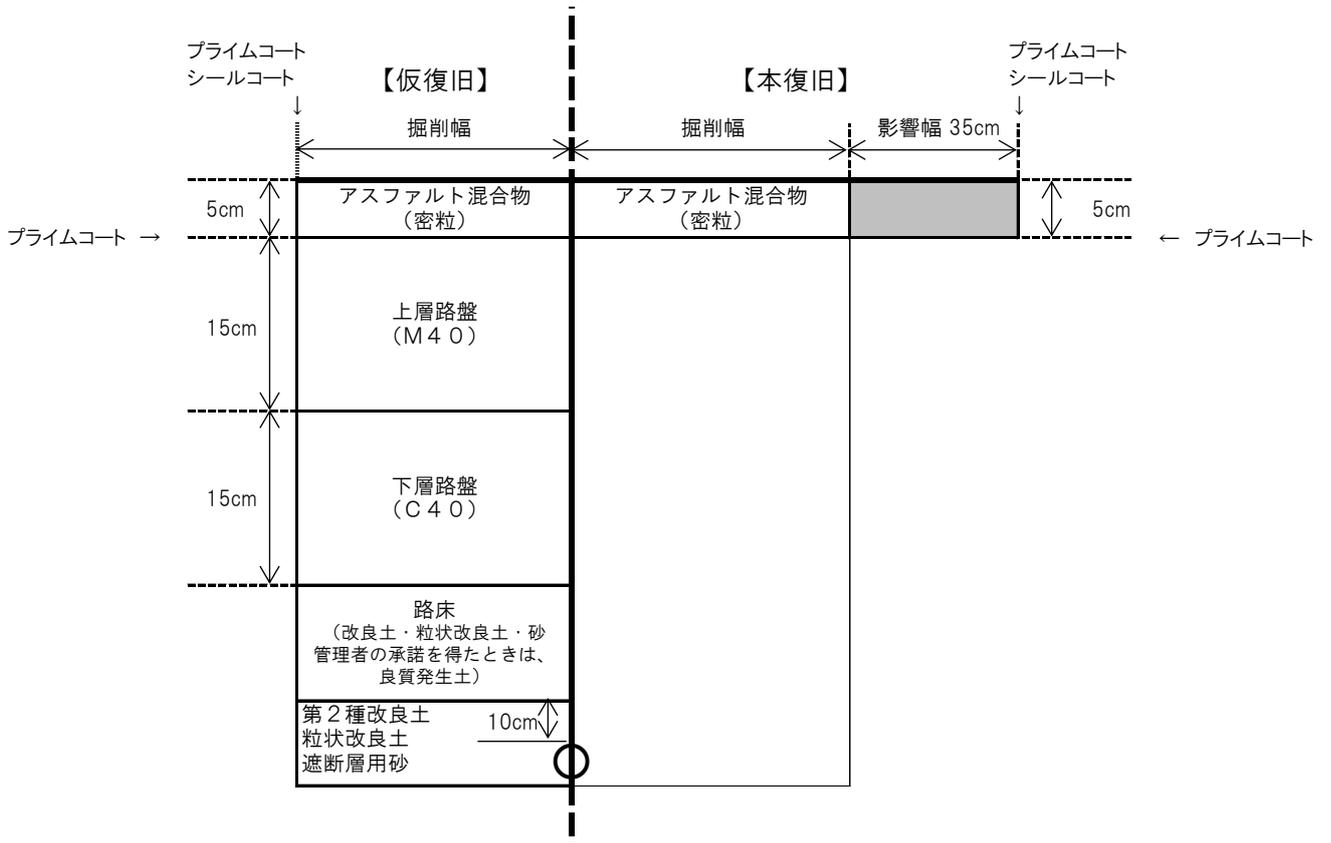


簡易A

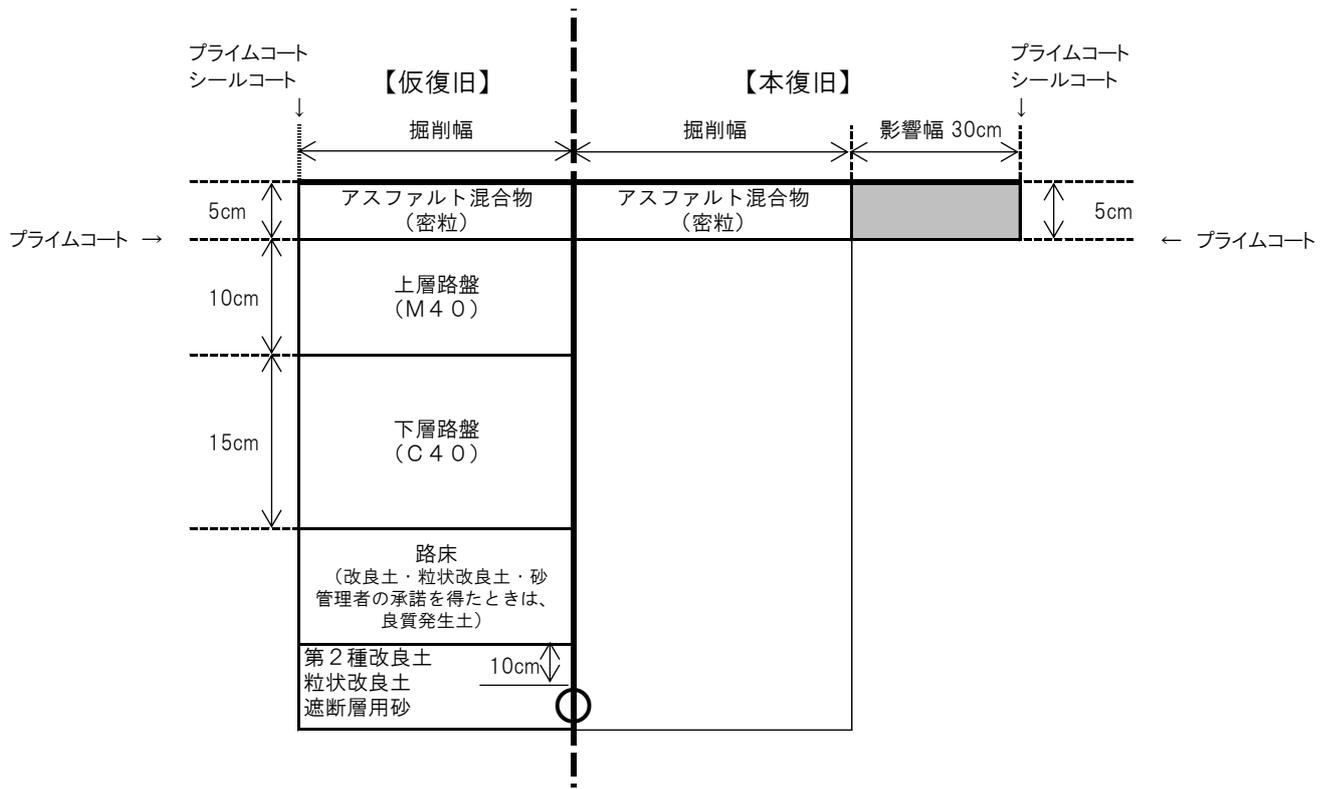


簡易B

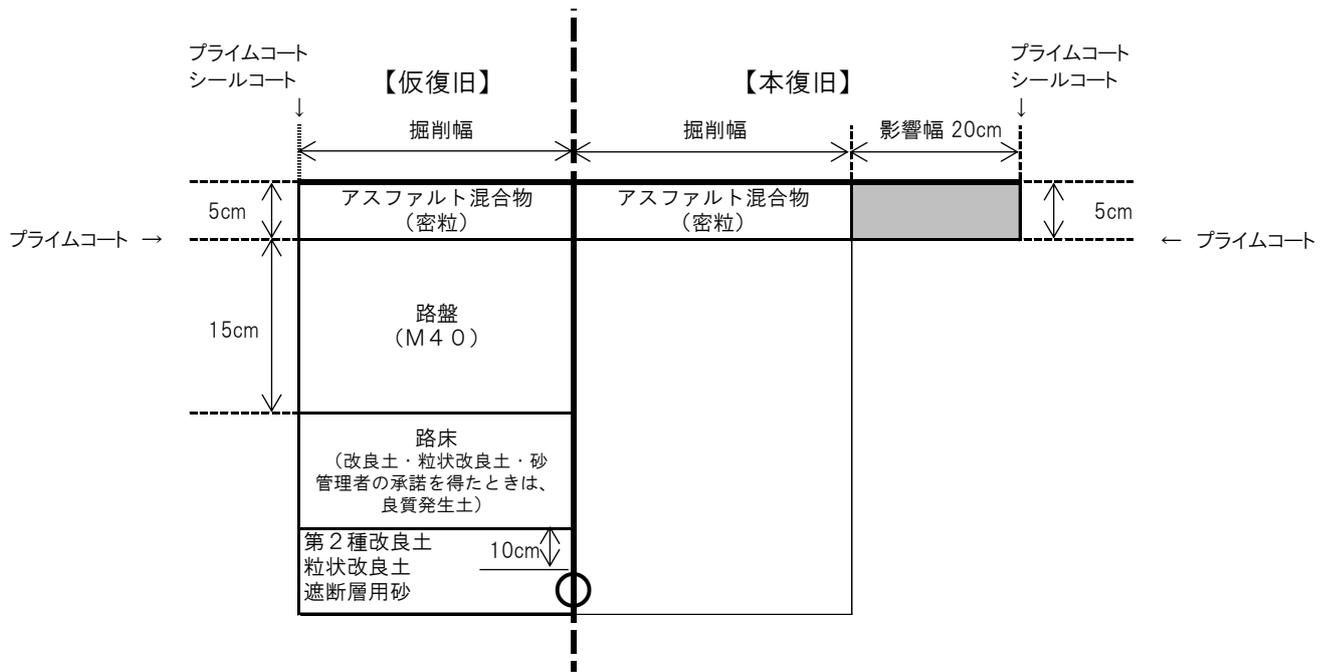


25型

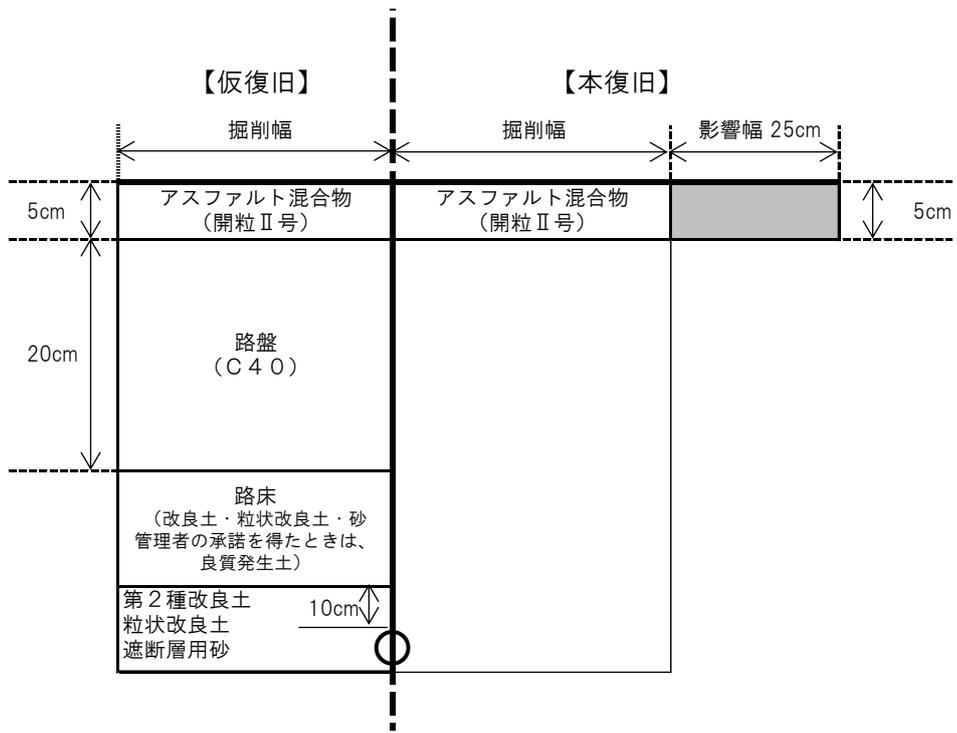


歩道B

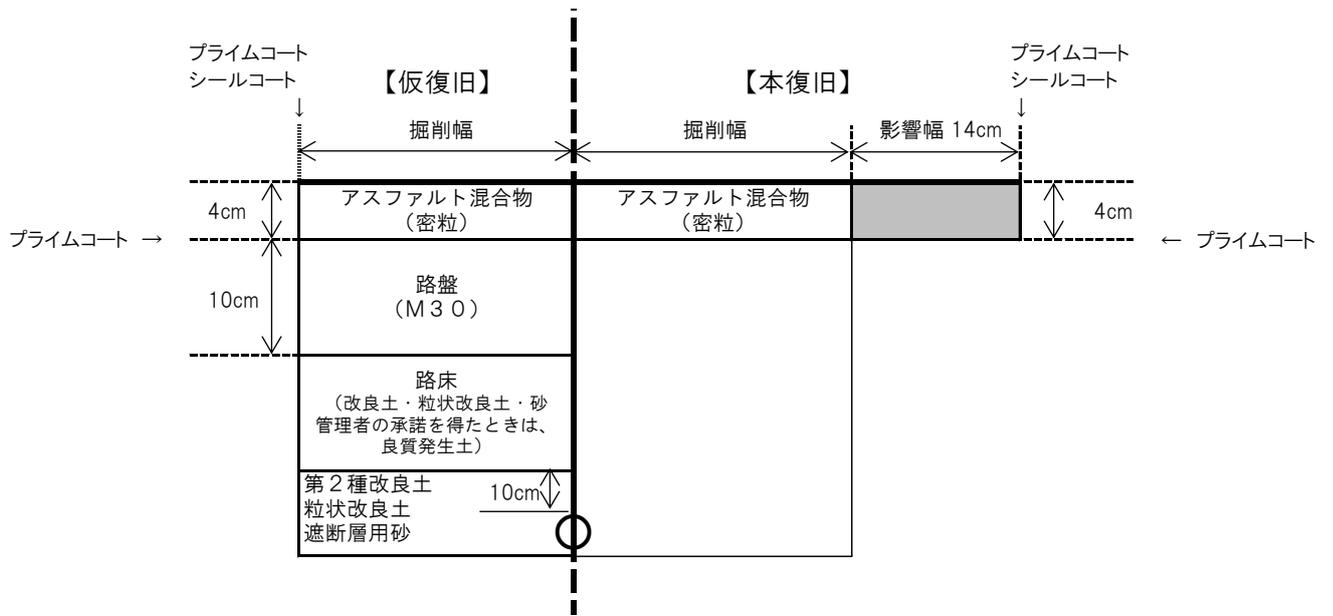


透水性24型

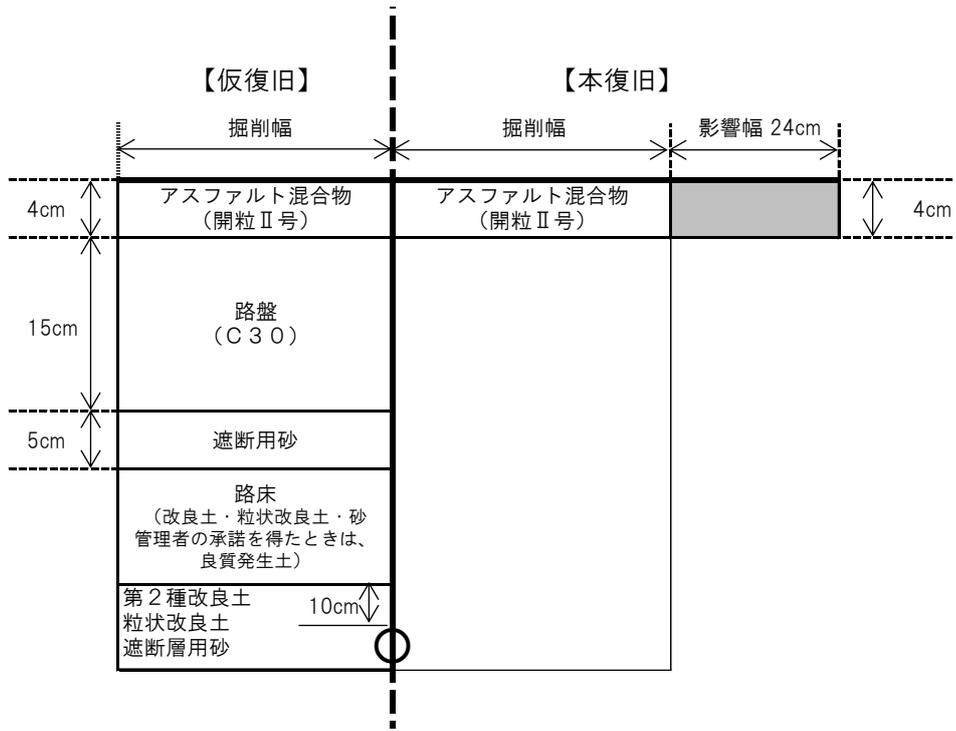


透水性19型

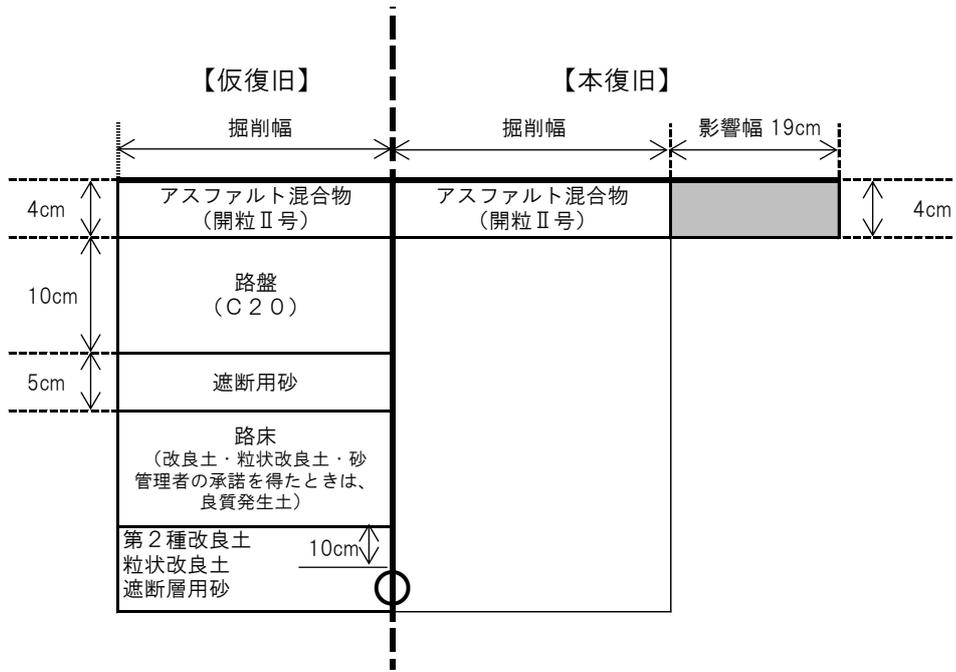


ILB透水型

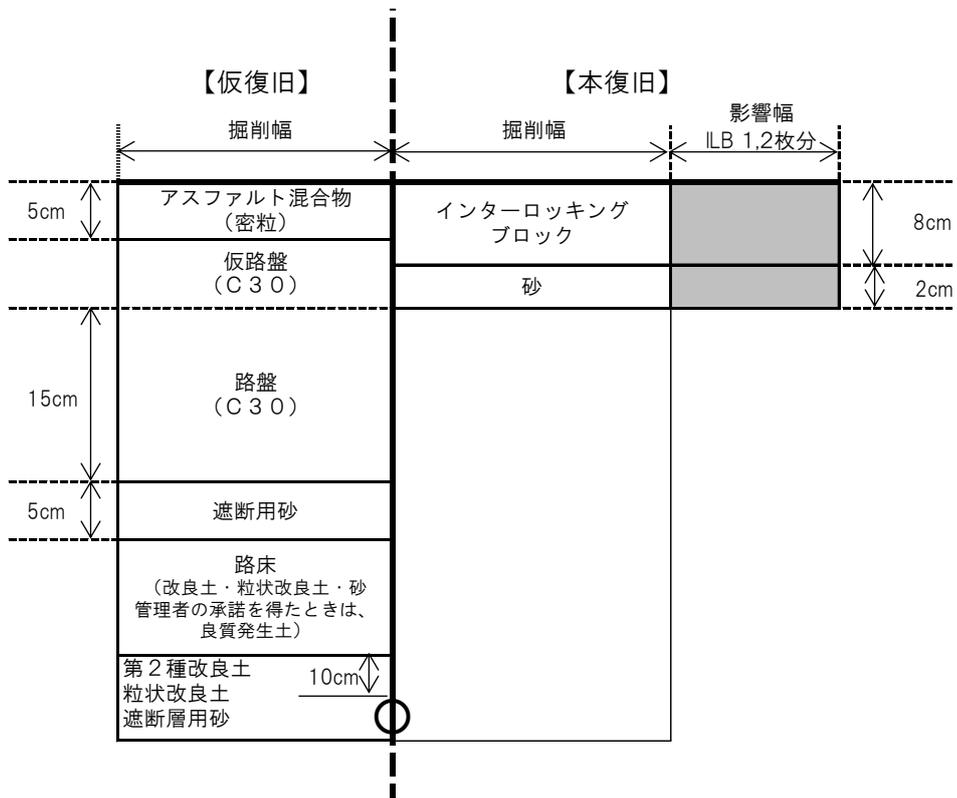


ILB非透水

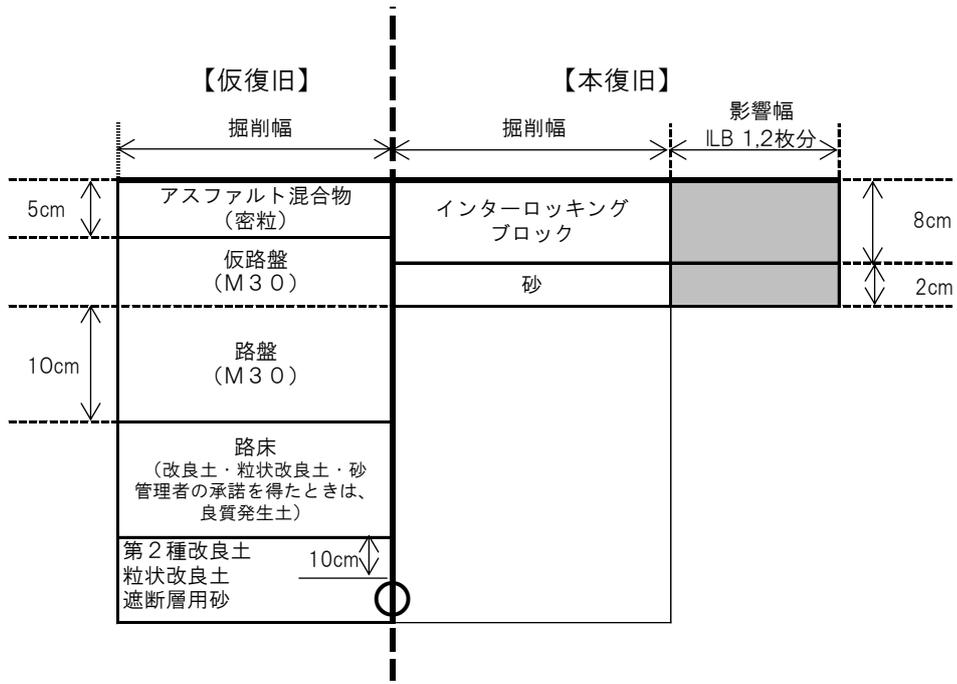


切下げCo

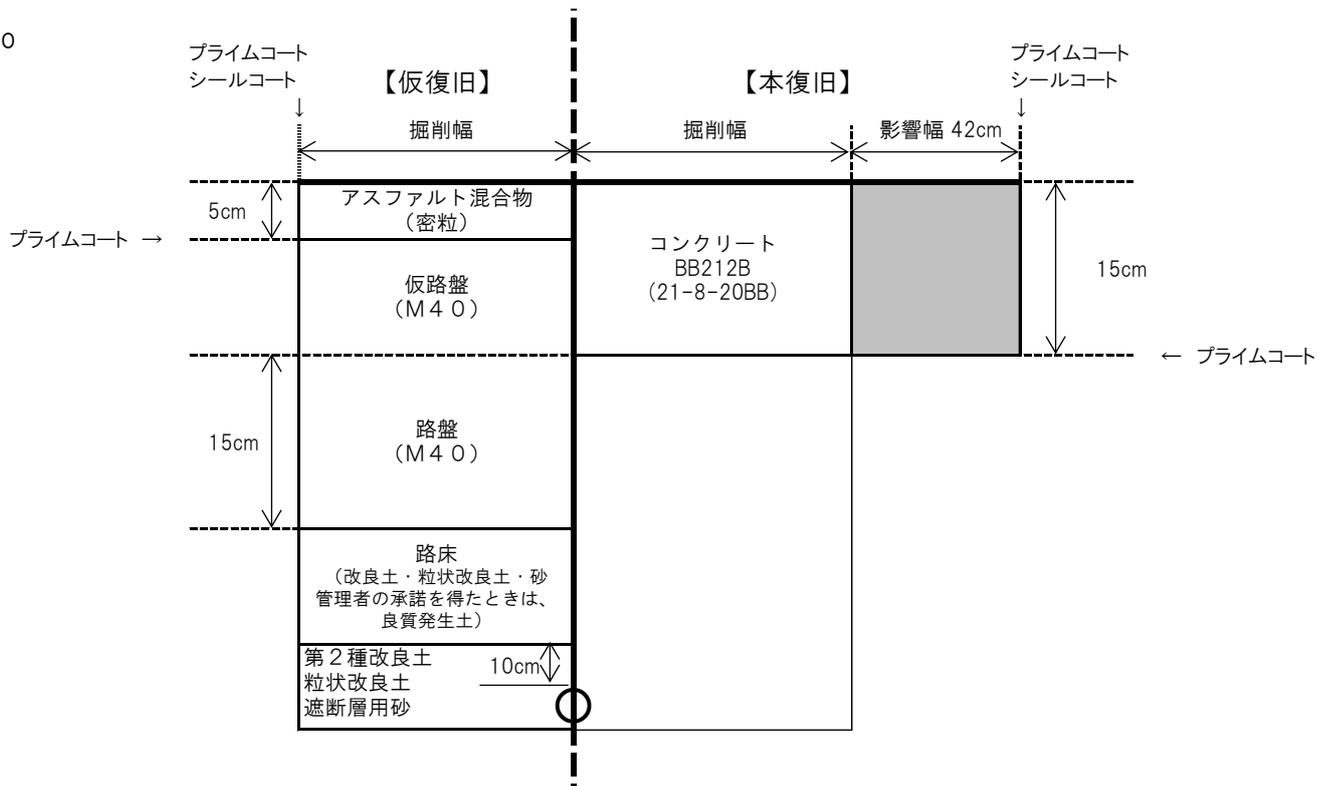


切下げCo大型

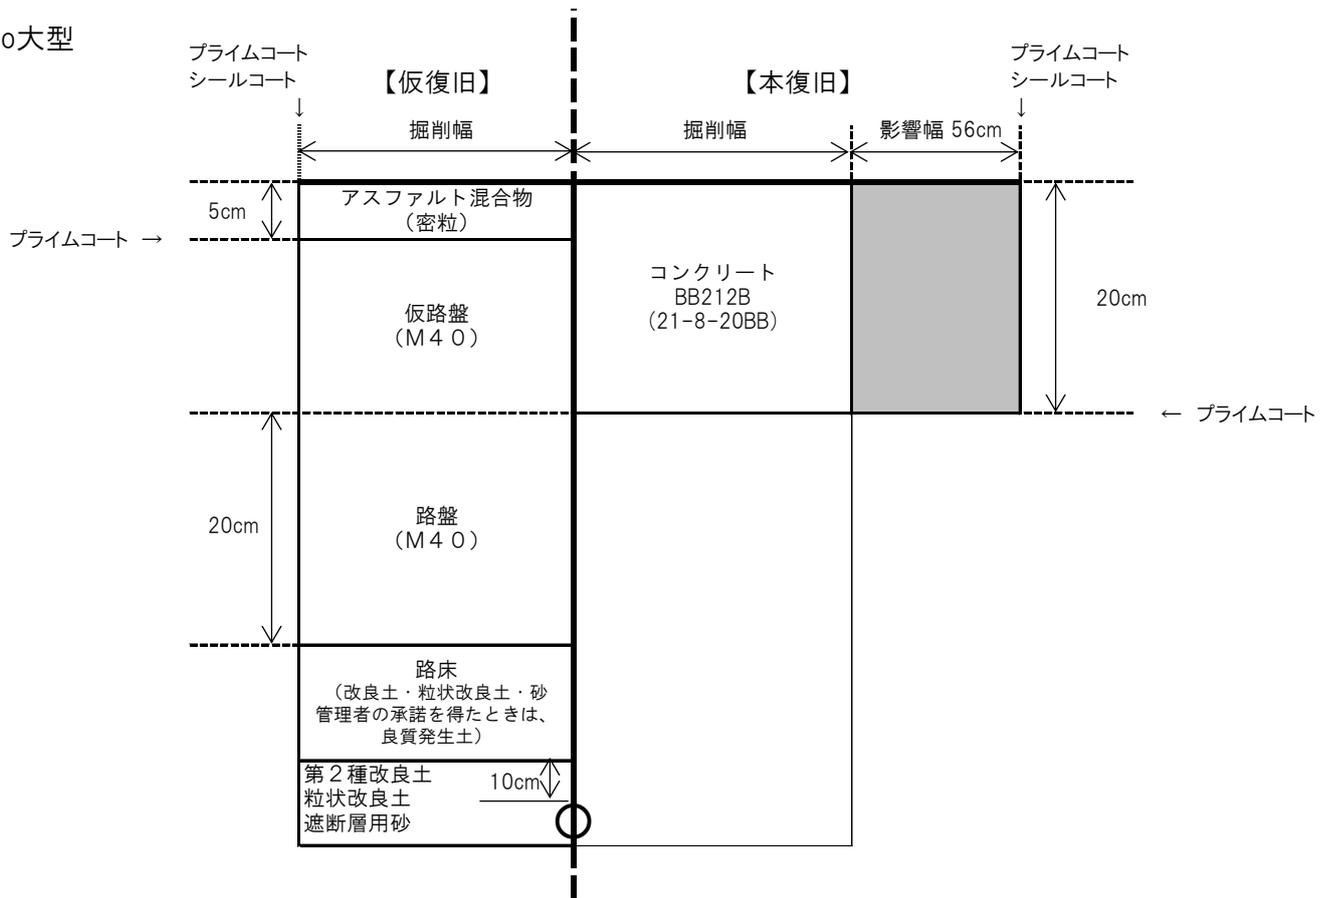

切下げAs

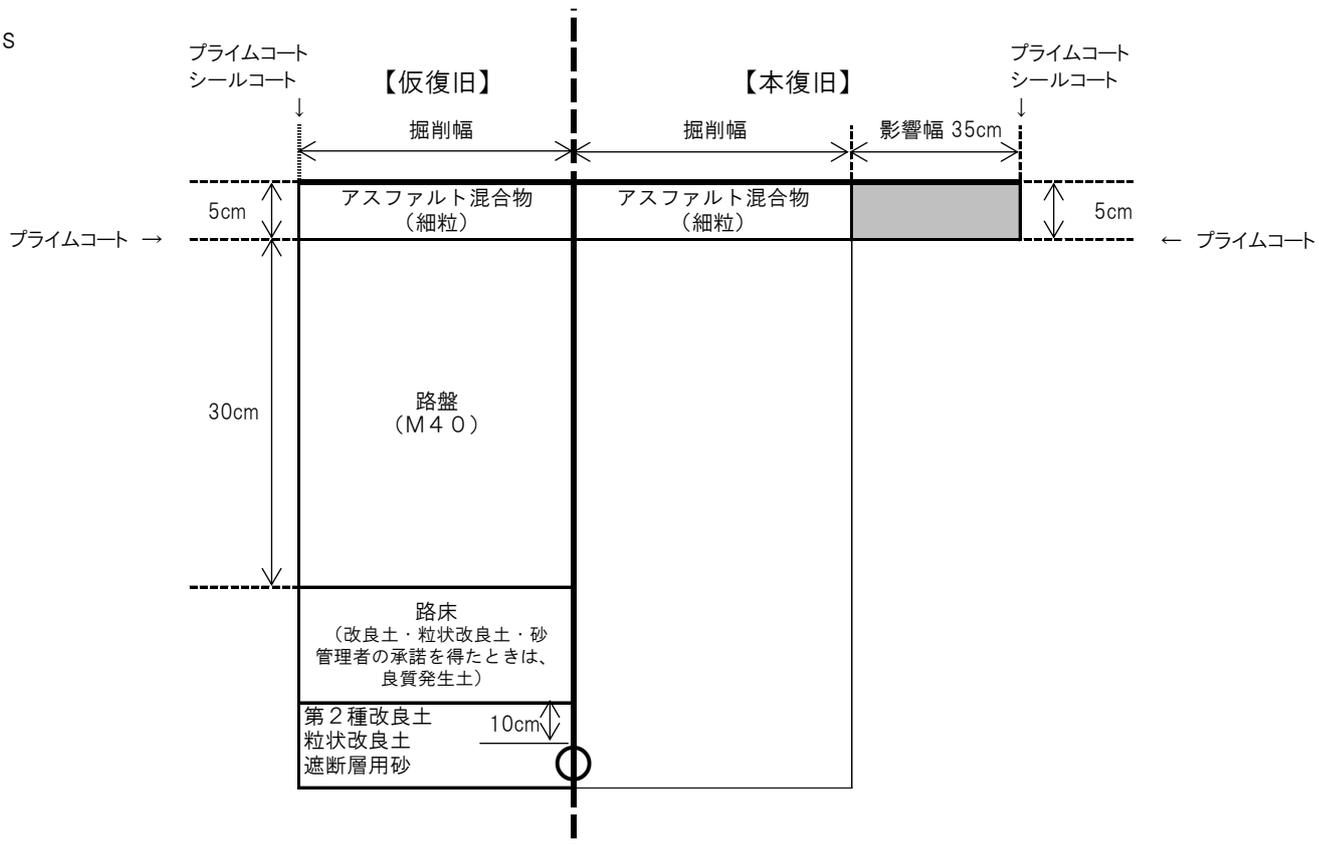

切下げAs大型

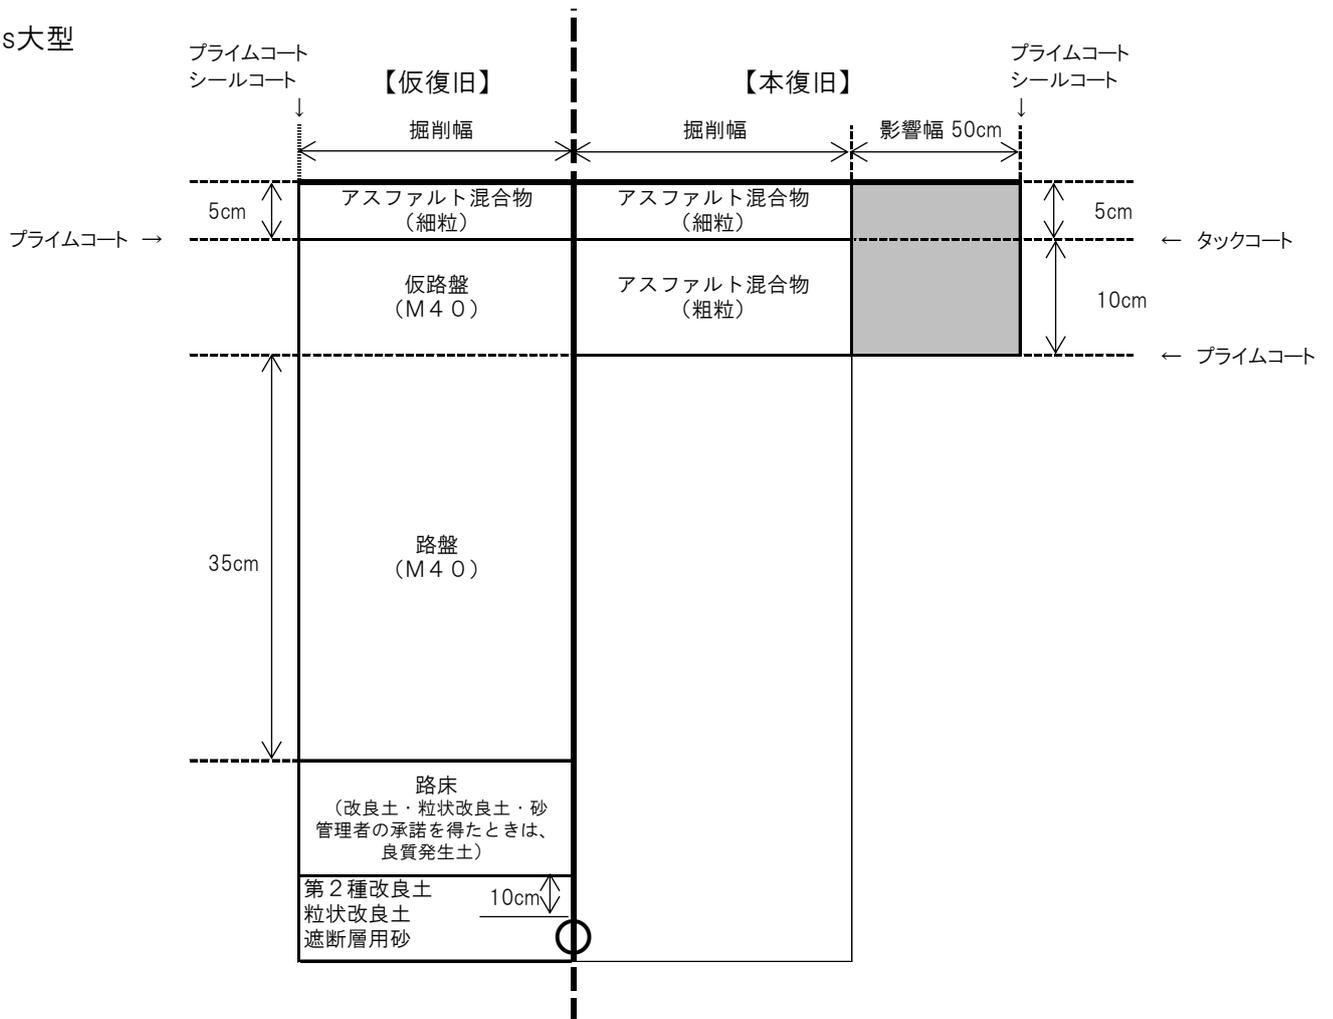

切下げILB

